

NOTE: ALL DIMENSIONS BEFORE PAINT.

MATERIAL AND FINISH DATA

CODE	NUT	WASHER	DOMES
ACR	A-286 CRES, PASSIVATED	ALUMINUM, ANODIZED	A-286 CRES, PASSIVATED
CR	A-286 CRES, PASSIVATED	A-286 CRES, PASSIVATED	A-286 CRES, PASSIVATED

THREAD T DATA


CODE	THREAD SIZE	D MIN	AXIAL TENSILE STRENGTH (LBS MIN)	INSTALLATION HOLE RANGE
08	8-32	.204	1720	.164-.204
3	10-32	.230	2460	.190-.230

BASEPLATE PRIMER

CODE	PRIMER
P	EPOXY PRIMER, GREEN

EXAMPLE PART NUMBER

CN610 ACR 3 P

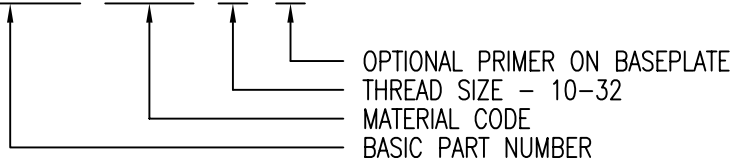

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES AND TOLERANCES ARE AS SHOWN BELOW. DIMENSIONAL TOLERANCES AND SYMBOLS PER ANSI Y14.5M-1982.

PROPRIETARY PARTS SHOWN IN THIS DRAWING ARE THE SUBJECT OF ISSUED UNITED STATES AND FOREIGN PATENTS AND PATENTS PENDING. UNAUTHORIZED REPRODUCTION AND/OR DISTRIBUTION OF THIS DRAWING IS SPECIFICALLY PROHIBITED.

GLICK BOND

CARSON CITY
NEVADA 89706

APPROVALS		DATE		TITLE			
ANGLES	±1°	DRAWN	DAC	NUTPLATE, FLOATING, SEALED			
.XX	±.03	CHECKED	DAC	SIZE	CAGE CODE	DWG. NO.	REV.
.XXX	±.010	RELEASED	CGH	A	66530	CN610	1
.XXXX	±.001	REVISED	DAC	SCALE	2/1 8JUL99		SHEET 1 OF 1